


**BaryCell®**

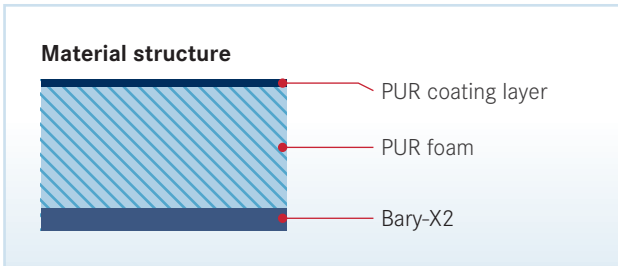

## Product

BaryCell is a combined material consisting of a flexible heavy plastic layer with non-organic fillers and PUR foam with black PUR coating. BaryCell has a high sound-damping and absorbing effect.

## Application

- Easy cutting with common instruments, such as knife, scissors.
- For BaryCell gluing, it is important that the surface of the base is clean, dry and free from greasing, oils, solvents and segregators. A two-component glue on the base of polyurethane (BarySkin V60 or BarySkin Y606) is recommended for gluing.
- When mounted vertically or on the ceiling, additional mechanical fastening is recommended.

## Product characteristics

- excellent absorbing properties in combination with good acoustic insulation
- high heat consistency
- easy and clean mounting
- dirt-repelling due to foil coating
- good cleaning possibility due to foil coating

## Absorption and acoustic insulation

