


BaryTex®

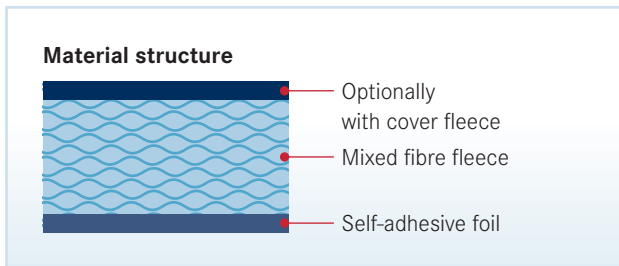

Product

BaryTex is a mixed fibre fleece, optionally available with thermoplastic fibres (BIKO-fibres) or phenol-formaldehyde resin, with single-sided or double-sided cover fleece, in self-adhesive or non self-adhesive version.


Application

- Easy cutting with common instruments, such as knife, scissors.
- Formable by pressing.
- For BaryTex gluing, it is important that the surface of the base is clean, dry and free from greasing, oils, solvents and segregators. A two-component glue on the base of polyurethane (BarySkin V60 or BarySkin Y606) is recommended for gluing.
- When mounted vertically or on the ceiling, additional mechanical fastening is recommended.


Product characteristics

- excellent absorbing properties
- possibility of moulding
- easy and clean mounting

Absorption

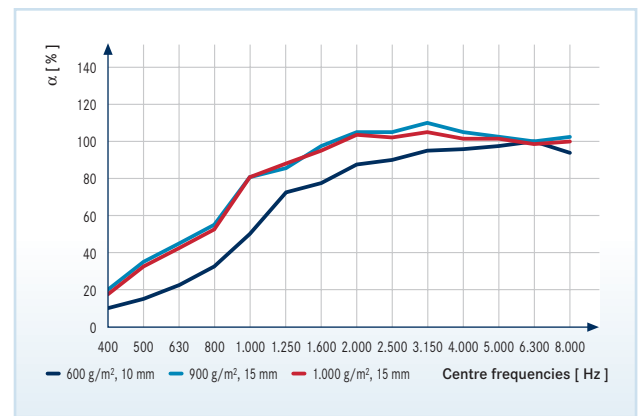

Absorption coefficient measured in cabin Alpha, Material: mixed fleece with thermoplastic fibres

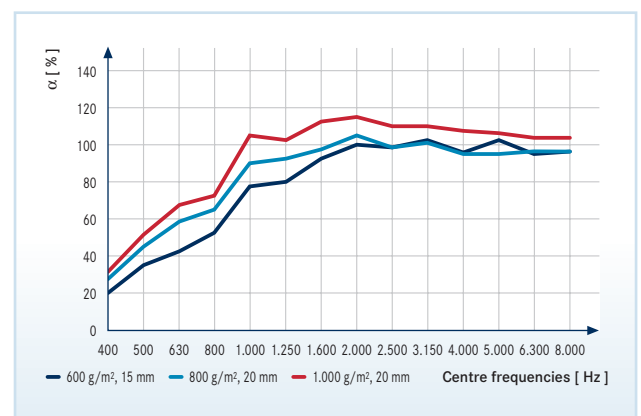

Absorption coefficient measured in cabin Alpha, Material: mixed fleece with phenolic resin